



PERSEUS C LED

Downlights



Images for the product family and options:

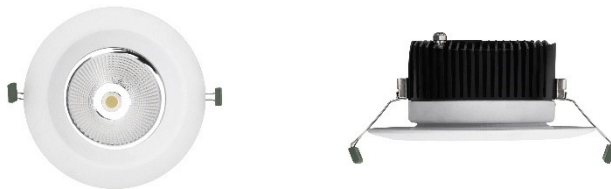

Description:

Recessed mounted waterproof LED downlight
Light distribution type: direct
Optical system: faceted aluminium reflector, 50°, low glare, tempered glass diffuser, silicon rubber gasket
Housing: aluminium
Colour: white (RAL9016)

General data:

Mains voltage: 220-240V, 50-60Hz
LED lifetime, h: 50000/L80B50 (75000/L80B50 for low power versions)
SDCM: 3
Protection class IEC: II
Ingress protection code: IP65
Mechanical impact resistance: IK05
Operating temperature range, °C: ta -20...+35

Installation:

In ceilings with cut-out openings (mounting brackets included). Cable, 0.3m, 2x0.75mm2

Environment:

Indoor/outdoor with roof

Application:

Office, hotel, bathroom, retail, showroom, exhibition, public place

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI	CCT*, K	Weight, kg
Perseus C LED1x2300 E956 T830 CLR	225	225	90	2183	19,9	110,00	80+	3000	1,2
Perseus C LED1x3100 E957 T830 CLR	225	225	90	2982	28	106,00	80+	3000	1,2
Perseus C LED1x4400 E958 T830 CLR	225	225	90	4294	42,3	101,00	80+	3000	1,2
Perseus C LED1x2300 E956 T840 CLR	225	225	90	2251	19,9	113,00	80+	4000	1,2
Perseus C LED1x3100 E957 T840 CLR	225	225	90	3074	28	110,00	80+	4000	1,2
Perseus C LED1x4400 E958 T840 CLR	225	225	90	4426	42,3	105,00	80+	4000	1,2

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Available options:

T830 Colour temperature 3000K, CRI 80+
T840 Colour temperature 4000K, CRI 80+
DALI Driver with DALI interface and switch-control dimming
CLR Clear glass
RAL RAL colour

