

KAPPA LED1X400 G870 T830 L40 • 1108889

Product:	Kappa LED1x400 G870 T830 L40
Order code:	1108889
Family:	Kappa LED
Product group:	Outdoor accent lighting

GENERAL DATA

Description:	Surface mounted accent LED luminaire Light distribution type: direct Optical system: tempered glass diffuser, impact resistant Housing: aluminium Colour: dark grey (RAL7043)
Installation:	On the wall. Screw terminal, 3x2.5mm ²
Environment	Outdoor
Application	facade illumination

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	4.2
Power factor:	>0,5	Integrated sensor:	None
Connection:	Screw terminal, 3x2.5mm ²		

LIGHTING DATA

Light source and cap, W:	1xLED (GU10)	Light source included:	yes
Luminaire output*, lm(ta+25°C):	380	System efficacy, lm/W:	90
CRI (Ra):	80+	CCT, K:	3000
Light Distribution:	Symmetrical narrow beam (16°...30°)	Distribution Type:	Direct
Beam angle, °:	27	LED lifetime, h:	15000/L70B50


TECHNICAL DATA

Net weight, kg:	1.4	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0032	Pallet quantity, pcs:	270
Dimensions, mm:	70x150x210		


STANDARDS

Operating temperature range, °C:	-25...+40 C	Protection class IEC:	I
Ingress protection code:	IP65	Mechanical impact resistance:	IK08
EEC:	F	Certificates:	CE, UKCA, RoHS
Warranty:	3 years		

Technical drawing (.jpg)

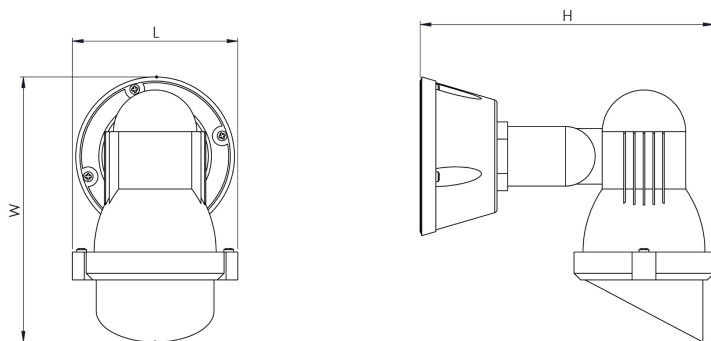

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Date of issue: 2024-05-04 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org