

SERPENS LED1X6800 J666 T840 OP LO4 SB • 1116589


Image not found or type unknown



Product:	Serpens LED1x6800 J666 T840 OP LO4 SB
Order code:	1116589
Family:	Serpens LED
Product group:	Aluminium profile luminaires

GENERAL DATA

Description:	A recessed medium profile LED luminaire for in-line connection Light distribution type: direct Optical system: opal polycarbonate diffuser Housing: aluminium Colour: white (RAL9003S)
Installation:	In ceilings with cut-out openings (mounting brackets included), with L/LL option is designed for in-line connection. Push-in terminal, 3x2x2.5mm2
Environment	Indoor
Application	office, education, corridor, retail, public place, hotel

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	56.7
Power factor:	0.93	Control gear:	ECG on/off
Integrated sensor:	None	Surge protection (L to N), kV:	1
Surge protection (L/N to PE), kV:	2	Inrush current (Imax/time):	35A/ 240µs
Overvoltage protection:	320 V AC, 48 h	Connection:	Push-in terminal, 3x2x2.5mm2

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	6773	System efficacy, lm/W:	119
CRI (Ra):	80+	CCT, K:	4000
SDCM:	3	Light Distribution:	Wide-wide beam (C0-C180 plane 76 ...125 , C90-C270 plane 76 ...125)
Distribution Type:	Direct	Beam angle, °:	109x109
LED lifetime, h:	50000/L80B10	Ripple current (≤120 Hz), %:	≤3

TECHNICAL DATA


Net weight, kg:	3.4	Mounting holes/cut-out dimensions, mm:	1702x68
Quantity in package, pcs:	1	Packaging volume, m3/pcs:	0.0115
Pallet quantity, pcs:	130		
Dimensions, mm:	1712x77x68		

STANDARDS


Operating temperature range, °C:	ta -15...+35	Protection class IEC:	I
Ingress protection code:	IP40	Mechanical impact resistance:	IK05
Glow wire test, °C:	650		

		EEC:	D
Certificates:	CE, UKCA, RoHS	Warranty:	3 years (5 years - see warranty Ts and Cs)

Technical drawing (.jpg)

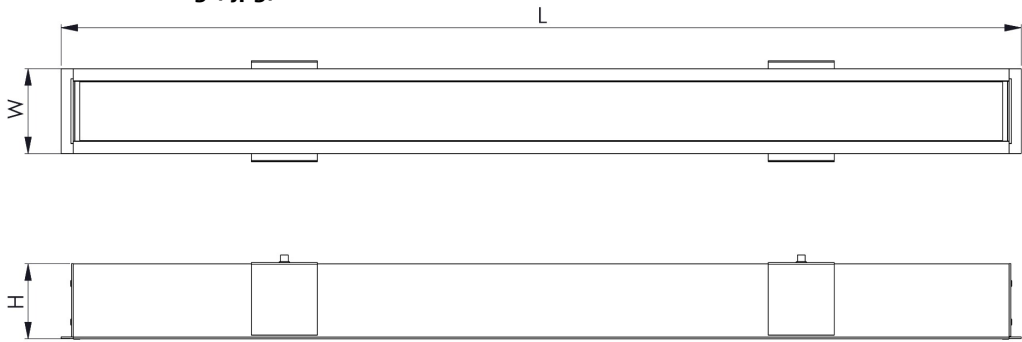

Light distribution curve (.jpg)



Note:	Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.
--------------	---