

BOREAS M LED1X23300 J451 T740 LS30 • 1118264


Product:	Boreas M LED1x23300 J451 T740 LS30
Order code:	1118264
Family:	Boreas M LED
Product group:	Floodlights

GENERAL DATA

Description:	Surface mounted LED floodlight Light distribution type: direct Optical system: lenses, tempered glass diffuser, impact resistant Housing: aluminium Colour: dark grey (RAL 7043)
Installation:	On horizontal or vertical surface. Push-in terminal, 3x2x2.5mm2
Environment	Outdoor
Application	park, public space, industry, parking area, sports, facade illumination, street

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50-60Hz	System power*, W:	152.9
Power factor:	0.98	Control gear:	ECG on/off
Integrated sensor:	None	Surge protection (L to N), kV:	6
Surge protection (L/N to PE), kV:	10	Inrush current (Imax/time):	80A/ 225µs
Overvoltage protection:	320 V AC, 48 h	Connection:	Push-in terminal, 3x2x2.5mm2

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	23259	System efficacy, lm/W:	152
CRI (Ra):	70+	CCT, K:	4000
SDCM:	5	Light Distribution:	Symmetrical narrow beam (16°...30°)
Distribution Type:	Direct	Beam angle, °:	27
LED lifetime, h:	100000/L90B10	Ripple current (≤120 Hz), %:	≤4


TECHNICAL DATA

Net weight, kg:	3.6	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0077	Pallet quantity, pcs:	80
Dimensions, mm:	381x312x62		


STANDARDS

Operating temperature range, °C:	-40...+35	Protection class IEC:	I
Ingress protection code:	IP66	Mechanical impact resistance:	IK08
EEC:	C	Certificates:	CE, UKCA, RoHS
Warranty:	3 years (5 years – see warranty Ts and Cs)		

Technical drawing (.jpg)

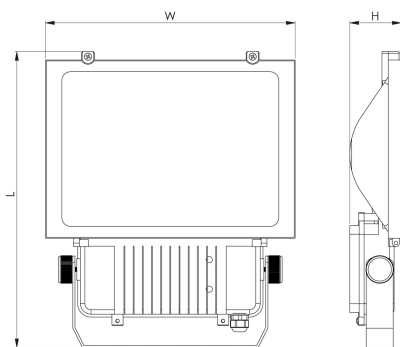

Light distribution curve (.jpg)

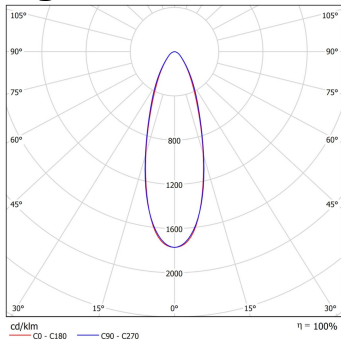

Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.