

SEASON 1PLED U56 OP AUT (FS.../BS.../RS..../LS...) • 1120297

Product:	Season 1PLED U56 OP AUT (FS.../BS.../RS..../LS...)
Order code:	1120297
Family:	Season LED
Product group:	Emergency lighting

GENERAL DATA

Description:	Surface mounted four-sided LED emergency exit sign Light distribution type: direct Optical system: opal polycarbonate diffuser Housing: steel / aluminium Colour: white, RAL9003 Battery charging time: 12 hours Battery: LiFePO4, deep discharge protection Recognition distance: 35 meters
Installation:	On the ceiling. Push-in terminal, 4x2x2.5mm ²
Environment	Indoor
Application	emergency exit sign

ELECTRICAL DATA

Mains voltage:	220-240V, 50-60Hz	System power*, W:	4
Power factor:	0.6	Control gear:	ECG on/off
Illumination mode:	M/NM	Emergency operating time, h:	1
Connection:	Push-in terminal, 4x2x2.5mm ²		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
CCT, K:	6000	SDCM:	3
Light Distribution:	Other	Distribution Type:	Omnidirectional
LED lifetime, h:	70000/L80B10		


TECHNICAL DATA

Net weight, kg:	2.9	Quantity in package, pcs:	1
Packaging volume, m³/pcs:	0.0269		
Dimensions, mm:	335x335x228		

STANDARDS

Operating temperature range, °C:	ta 0...+40	Protection class IEC:	I
Ingress protection code:	IP54	Mechanical impact resistance:	IK08
Certificates:	CE, UKCA, RoHS	Warranty:	2 years

Technical drawing (.jpg)

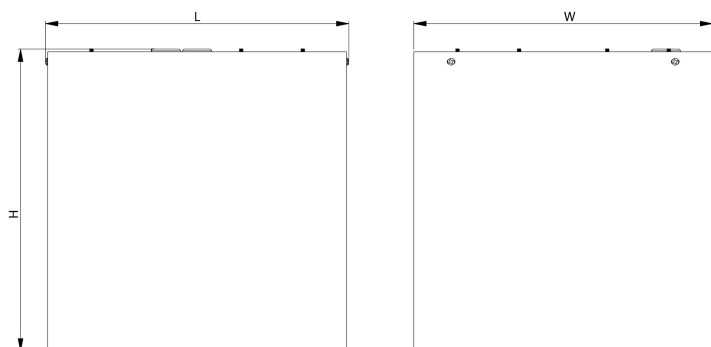

Note:

*: M-maintained (with an option of connecting as non-maintained), NM- non-maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: $\pm 10\%$, values apply to an ambient temperature of 25°C. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.

Date of issue: 2024-05-12 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org