

SHOP LSW LED1X10250 G012 T840 LS2A40 LO2 L1 • 1100793

Product:	Shop LSW LED1x10250 G012 T840 LS2A40 LO2 L1
Order code:	1100793
Family:	-
Product group:	Continuous line and batten luminaires

GENERAL DATA

Description:	A continuous line LED luminaire with various optics, quick and tool-free mounting to cut installation cost to the minimum Optics: 30x90°, 60x100°, 90x100°, asymmetric and double asymmetric light beam Body and end caps: steel sheet, white finish Luminaire with an option L or LL is designed for in-line connection
Installation:	Suspended (suspension brackets are included). Through wired, 5x1.5mm ² , two connectors, 5-pole plug(1601/VC) and socket(1602/VC), STUCHHI
Environment	Indoor
Application	retail, public place, hall

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	58.6
Power factor:	>0,95	Control gear:	ECG on/off
Connection:	Through wired, 5x1.5mm ² , two connectors, 5-pole plug(1601/VC) and socket(1602/VC), STUCHHI		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
System efficacy, lm/W:	169	CRI (Ra):	80+
CCT, K:	4000	Light Distribution:	Asymmetrical
Distribution Type:	Direct	UGR index:	-
LED lifetime, h:	100000/L80B50		


TECHNICAL DATA

Net weight, kg:	6.3	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0169	Pallet quantity, pcs:	170
Dimensions, mm:	2875x67x66		

STANDARDS

Operating temperature range, °C:	ta 0...+40	Protection class IEC:	I
Ingress protection code:	IP20	Mechanical impact resistance:	IK05
EEC:	A++	Certificates:	CE, RoHS
Warranty:	3 years		


Technical drawing (.jpg)

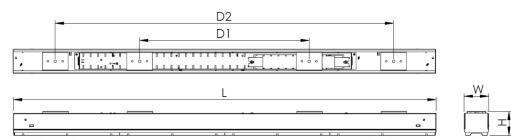

L*,mm	W, mm	H, mm	D1, mm	D2, mm
1155	67	66	350-995	-
1442			550-1300	-
2875			600-1200	1700-2650

* - L 2mm shorter (one end open), LL 4mm shorter (both ends open)

Light distribution curve (.jpg)



Date of issue: 2024-04-19 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org