

MIRA LED1X1400 D552 T830 OP • 1023755

Product:	Mira LED1x1400 D552 T830 OP
Order code:	1023755
Family:	Mira LED
Product group:	Plastikiniai šviestuvai

GENERAL DATA

Description:	A surface mounted mirror LED luminaire Light distribution type: direct Optical system: opal polycarbonate diffuser Housing: aluminium Colour: white
Installation:	On the wall (mounting brackets included). Screw terminal, 2x1.5mm2
Environment	Indoor
Application	hotel, bathroom, healthcare

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	15
Power factor:	>0,55	Control gear:	ECG on/off
Integrated sensor:	None	Connection:	Screw terminal, 2x1.5mm2

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	1400	System efficacy, lm/W:	93
CRI (Ra):	80+	CCT, K:	3000
SDCM:	5	Light Distribution:	Wide-wide beam (C0-C180 plane 76 ...125 , C90-C270 plane 76 ...125)
Distribution Type:	Direct	Beam angle, °:	156x103
LED lifetime, h:	30000/L70B50		


TECHNICAL DATA

Net weight, kg:	0.6	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0029	Pallet quantity, pcs:	400
Dimensions, mm:	600x53x65		


STANDARDS

Operating temperature range, °C:	ta 0...+35	Protection class IEC:	II
Ingress protection code:	IP44	Mechanical impact resistance:	IK04
EEC:	F	Certificates:	CE, UKCA, RoHS
Warranty:	3 years		

Technical drawing (.jpg)

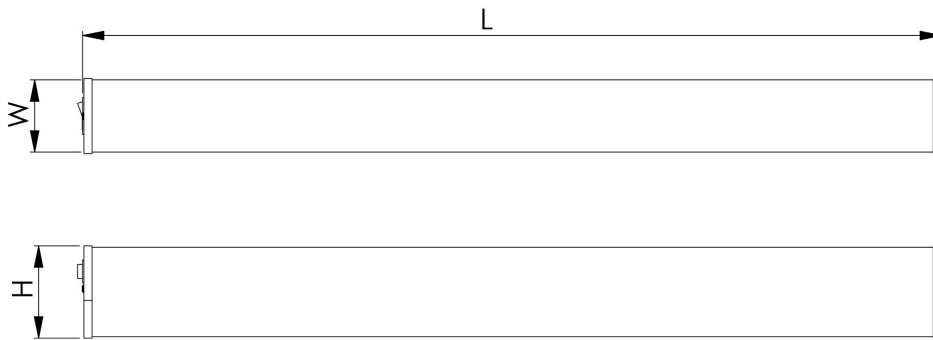

Light distribution curve (.jpg)



Note: Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.