

LUPI LED1X1100/1100 D848 T840 OP LG3 • 1100838


Product:	Lupi LED1x1100/1100 D848 T840 OP LG3
Order code:	1100838
Family:	Lupi LED
Product group:	Diffuser and wall luminaires

GENERAL DATA

Description:	Wall mounted decorative LED luminaire Light distribution type: direct/indirect Optical system: opal polycarbonate diffuser Housing: aluminium Colour: light grey (RAL 9006)
Installation:	On the wall. Push-in terminal, 5x2x2.5mm2
Environment	Indoor
Application	hotel, bathroom

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	19.6
Power factor:	>0,95	Control gear:	ECG on/off
Integrated sensor:	None	Connection:	Push-in terminal, 5x2x2.5mm2

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	2168	System efficacy, lm/W:	110
CRI (Ra):	80+	CCT, K:	4000
SDCM:	3	Light Distribution:	Wide-wide beam (C0-C180 plane 76 ...125 , C90-C270 plane 76 ...125)
Distribution Type:	Direct/indirect (50/50)	Beam angle, °:	101x104
LED lifetime, h:	50000/L80B10		


TECHNICAL DATA

Net weight, kg:	2	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0048	Pallet quantity, pcs:	180
Dimensions, mm:	580x85x75		


STANDARDS

Operating temperature range, °C:	ta -15...+35	Protection class IEC:	I
Ingress protection code:	IP44	Mechanical impact resistance:	IK05
Glow wire test, °C:	650	EEC:	E
Certificates:	CE, UKCA, RoHS	Warranty:	3 years (5 years – see warranty Ts and Cs)

Technical drawing (.jpg)

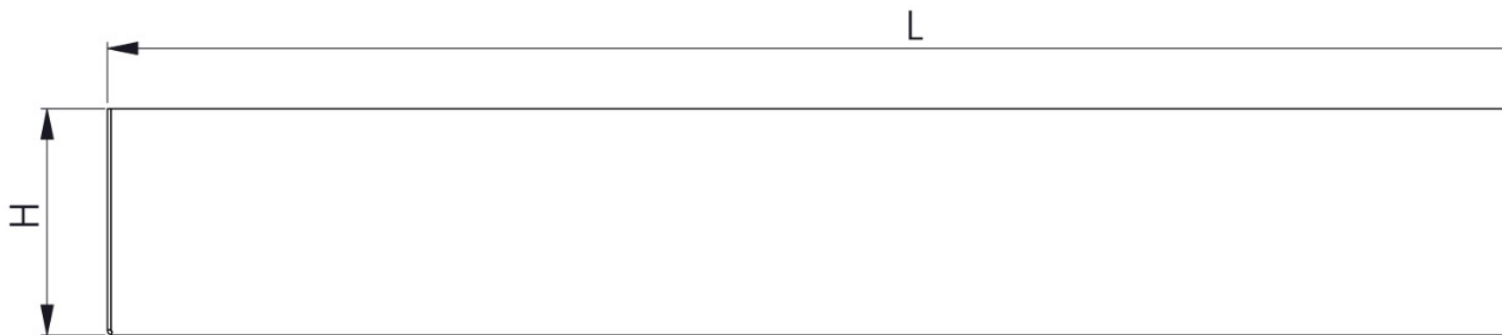

Light distribution curve (.jpg)



Note:	Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.
--------------	---