

NORTHER CEBLED C336 • 1019197

Product:	Norther CEBLED C336
Order code:	1019197
Family:	Norther LED
Product group:	Emergency lighting

GENERAL DATA

Description:	Surface mounted LED emergency escape luminaire Light distribution type: direct Optical system: tempered glass diffuser, impact resistant Housing: stainless steel Colour: white (RAL9003)
Installation:	On the wall. Push-in terminal, 3x2x2.5mm2
Environment	Outdoor
Application	escape route lighting

ELECTRICAL DATA

Mains voltage:	220-240VAC, 50-60Hz; 176-275VDC	System power*, W:	3
Power factor:	>0,60	Control gear:	ECG on/off
Illumination mode:	CEB	Emergency operating time, h:	x
Connection:	Push-in terminal, 3x2x2.5mm2		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	460	CRI (Ra):	80+
CCT, K:	6500	SDCM:	5
Light Distribution:	Asymmetrical	Distribution Type:	Direct
Beam angle, °:	Asymmetrical	LED lifetime, h:	50000/L80B50


TECHNICAL DATA

Net weight, kg:	1.5	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0041	Pallet quantity, pcs:	225
Dimensions, mm:	222x77x227		


STANDARDS

Operating temperature range, °C:	ta -25...+50	Protection class IEC:	I
Ingress protection code:	IP66	Mechanical impact resistance:	IK10
Certificates:	CE, UKCA, RoHS	Warranty:	2 years

Technical drawing (.jpg)

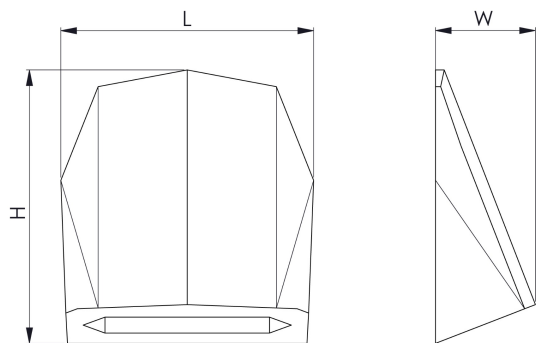

Light distribution curve (.jpg)

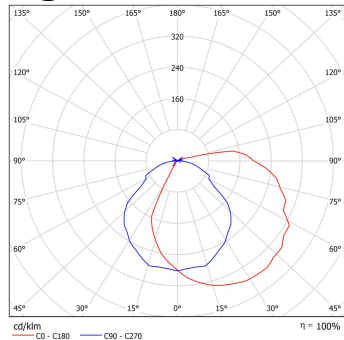

Note:

*: M-maintained (with an option of connecting as non-maintained), NM- non-maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: $\pm 10\%$, values apply to an ambient temperature of 25°C

Date of issue: 2024-04-17 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org