

**TAURUS 1HLED G05 DELUXE • 1019229**

Product:	Taurus 1HLED G05 Deluxe
Order code:	1019229
Family:	Taurus LED
Product group:	Emergency lighting

**GENERAL DATA**

<b>Description:</b>	Surface mounted double-sided LED emergency exit sign Light distribution type: omnidirectional Optical system: clear PMMA diffuser Housing: extruded aluminium Colour: light grey Battery charging time: 24 hours Battery: NiCd, deep discharge protection Recognition distance: 30 meters
---------------------	--

<b>Installation:</b>	On the ceiling or wall (mounting brackets included), or suspended (requires an accessory). Push-in terminal, 4x2x2.5mm <sup>2</sup>
----------------------	---

<b>Environment</b>	Indoor
--------------------	--------

<b>Application</b>	emergency exit sign
--------------------	---------------------

**ELECTRICAL DATA**

<b>Mains voltage:</b>	220-240V, 50/60Hz	<b>System power*, W:</b>	1
<b>Power factor:</b>	>0,60	<b>Control gear:</b>	ECG on/off
<b>Illumination mode:</b>	NM	<b>Emergency operating time, h:</b>	1
<b>Connection:</b>	Push-in terminal, 4x2x2.5mm <sup>2</sup>		

**LIGHTING DATA**

<b>Light source and cap, W:</b>	LED	<b>Light source included:</b>	yes
<b>CRI (Ra):</b>	80+	<b>CCT, K:</b>	6500
<b>SDCM:</b>	3	<b>Light Distribution:</b>	Other
<b>Distribution Type:</b>	Omnidirectional	<b>LED lifetime, h:</b>	50000/L80B50


**TECHNICAL DATA**

<b>Net weight, kg:</b>	1.25	<b>Quantity in package, pcs:</b>	1
<b>Packaging volume, m<sup>3</sup>/pcs:</b>	0.0039	<b>Pallet quantity, pcs:</b>	256
<b>Dimensions, mm:</b>	315x48x243		

**STANDARDS**

<b>Operating temperature range, °C:</b>	ta 0...+40	<b>Protection class IEC:</b>	I
<b>Ingress protection code:</b>	IP41	<b>Mechanical impact resistance:</b>	IK02
<b>Certificates:</b>	CE, UKCA, RoHS	<b>Warranty:</b>	2 years

Technical drawing (.jpg)

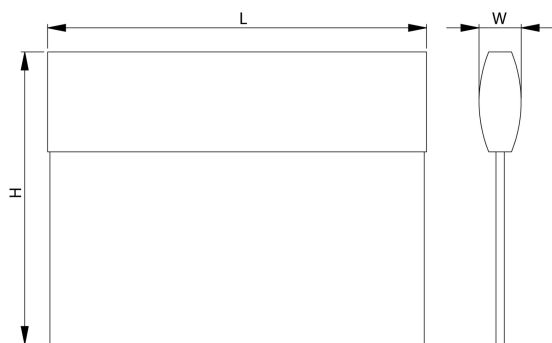

---

**Note:**

\*: M-maintained (with an option of connecting as non-maintained), NM- non-maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data:  $\pm 10\%$ , values apply to an ambient temperature of 25°C

---

Date of issue: 2024-04-18 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ [info@northcliffe.org](mailto:info@northcliffe.org) ■ [www.northcliffe.org](http://www.northcliffe.org)