

TAURUS 3PLED G10 DELUXE AUT • 1019239

Product:	Taurus 3PLED G10 Deluxe AUT
Order code:	1019239
Family:	Taurus LED
Product group:	Emergency lighting

GENERAL DATA

Description:	Surface mounted double-sided LED emergency exit sign Light distribution type: omnidirectional Optical system: clear PMMA diffuser Housing: extruded aluminium Colour: light grey Battery charging time: 12 hours Battery: NiCd, deep discharge protection Recognition distance: 30 meters
---------------------	--

Installation:	On the ceiling or wall (mounting brackets included), or suspended (requires an accessory). Push-in terminal, 4x2x2.5mm ²
----------------------	---

Environment	Indoor
--------------------	--------

Application	emergency exit sign
--------------------	---------------------

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	1
Power factor:	>0,60	Control gear:	ECG on/off
Illumination mode:	M/NM	Emergency operating time, h:	3
Connection:	Push-in terminal, 4x2x2.5mm ²		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
CRI (Ra):	80+	CCT, K:	6500
SDCM:	3	Light Distribution:	Other
Distribution Type:	Omnidirectional	LED lifetime, h:	50000/L80B50


TECHNICAL DATA

Net weight, kg:	1.25	Quantity in package, pcs:	1
Packaging volume, m³/pcs:	0.0039	Pallet quantity, pcs:	256
Dimensions, mm:	315x48x243		

STANDARDS

Operating temperature range, °C:	ta 0...+40	Protection class IEC:	I
Ingress protection code:	IP41	Mechanical impact resistance:	IK02
Certificates:	CE, UKCA, RoHS	Warranty:	2 years

Technical drawing (.jpg)

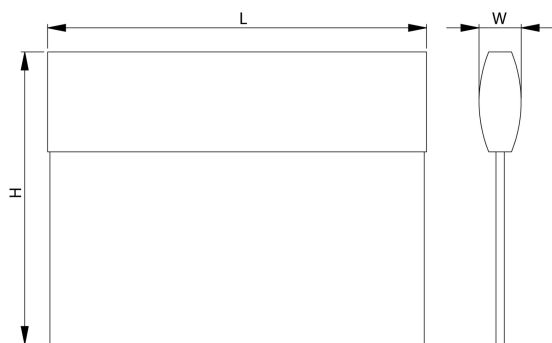

Note:

*: M-maintained (with an option of connecting as non-maintained), NM- non-maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: $\pm 10\%$, values apply to an ambient temperature of 25°C

Date of issue: 2024-04-20 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org