

## SPICA LED1X5100 D958 T830 LS90X100 • 1101253



Product:	Spica LED1x5100 D958 T830 LS90x100
Order code:	1101253
Family:	Spica LED
Product group:	Spotlights

### GENERAL DATA

Description:	A linear LED track light with various optics designed for the general lighting Optics: 30x90°, 60x100°, 90x100°, asymmetric and double asymmetric light beam Body: steel sheet, white finish, with adaptor	
Instalation:	Surface luminaire is designed to be fixed into $4/6$ -conductors surface/recessed tracks. Track adaptor (3-phase $+$ N) with phase selector	
Environment	Indoor	
Application	retail, public place, showroom, exhibition	

### ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	35
Power factor:	>0,95	Control gear:	ECG on/off
Connection:	Track adaptor (3-phase + N) with phase selector		
LIGHTING DATA			

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	4878	System efficacy, lm/W:	139
CRI (Ra):	80+	CCT, K:	3000
SDCM:	3	Distribution Type:	Direct
LED lifetime, h:	100000/L80B50		


### TECHNICAL DATA

Net weight, kg:	3.4	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0085	Pallet quantity, pcs:	100
Dimensions mm:	1155×20×70		


### **STANDARDS**

Operating temperature range, °C:	ta 0+35	Protection class IEC:	I
Ingress protection code:	IP20	Mechanical impact resistance:	IK02
EEC:	A++	Certificates:	CE, RoHS
Warranty:	3 years		

Technical drawing (.jpg)

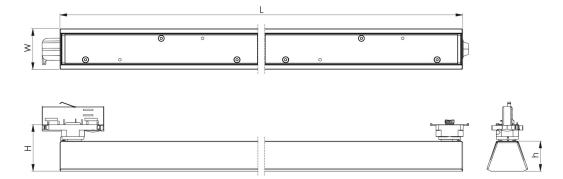

# Light distribution curve (.jpg)



**Note:** Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C

Date of issue: 2024-04-17 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org