

**AURIGA LED1X2500 D330 T840 CLR • 1019622**

Product:	Auriga LED1x2500 D330 T840 CLR
Order code:	1019622
Family:	Auriga LED
Product group:	Downlights

**GENERAL DATA**

<b>Description:</b>	Recessed mounted LED downlight Light distribution type: direct Optical system: faceted aluminium reflector, 60°, low glare, clear glass diffuser Housing: aluminium Colour: white (RAL9016)
<b>Installation:</b>	In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5mm2
<b>Environment</b>	Indoor
<b>Application</b>	office, education, corridor, retail, public place, showroom, hotel, bathroom, exhibition

**ELECTRICAL DATA**

<b>Mains voltage:</b>	220-240V, 0/50/60Hz	<b>System power*, W:</b>	18.7
<b>Power factor:</b>	0.95	<b>Control gear:</b>	ECG on/off
<b>Integrated sensor:</b>	None	<b>Connection:</b>	Push-in terminal, 2x1x1.5mm2

**LIGHTING DATA**

<b>Light source and cap, W:</b>	LED	<b>Light source included:</b>	yes
<b>Luminaire output*, lm(ta+25°C):</b>	2553	<b>System efficacy, lm/W:</b>	137
<b>CRI (Ra):</b>	80+	<b>CCT, K:</b>	4000
<b>SDCM:</b>	3	<b>Light Distribution:</b>	Symmetrical medium beam (31...75°)
<b>Distribution Type:</b>	Direct	<b>Beam angle, °:</b>	60
<b>UGR index:</b>	≤19	<b>LED lifetime, h:</b>	60000/L80B10


**TECHNICAL DATA**

<b>Net weight, kg:</b>	0.8	<b>Mounting holes/cut-out dimensions, mm:</b>	d165
<b>Quantity in package, pcs:</b>	1	<b>Packaging volume, m3/pcs:</b>	0.0048
<b>Pallet quantity, pcs:</b>	180		
<b>Dimensions, mm:</b>	195x195x100		

**STANDARDS**


<b>Operating temperature range, °C:</b>	ta 0...+35	<b>Protection class IEC:</b>	II
<b>Ingress protection code:</b>	IP44	<b>Mechanical impact resistance:</b>	IK04
<b>EEC:</b>	C	<b>Certificates:</b>	CE, UKCA, RoHS
<b>Warranty:</b>	3 years (5 years – see warranty Ts and Cs)		

Technical drawing (.jpg)

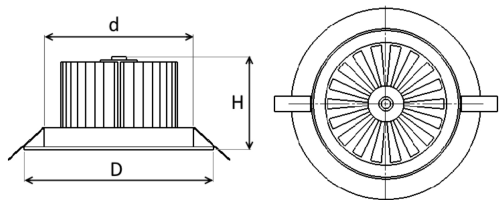

∅ D, mm	d, mm	H, mm	A, mm
195	153	100	165

### Light distribution curve (.jpg)

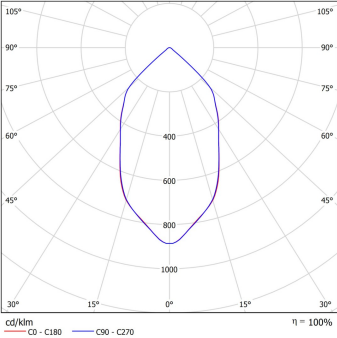

Note:

Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.