

AURIGA LED1X1900 D329 T830 OP LT80 • 1019624

Product:	Auriga LED1x1900 D329 T830 OP LT80
Order code:	1019624
Family:	Auriga LED
Product group:	Downlights

GENERAL DATA

Description:	Recessed mounted LED downlight Light distribution type: direct Optical system: faceted aluminium reflector, 60°, low glare, opal PMMA diffuser Housing: aluminium Colour: white (RAL9016)
Installation:	In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5mm2
Environment	Indoor
Application	office, education, corridor, retail, public place, showroom, hotel, bathroom, exhibition

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	13.5
Power factor:	0.95	Control gear:	ECG on/off
Integrated sensor:	None	Connection:	Push-in terminal, 2x1x1.5mm2

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	1611	System efficacy, lm/W:	119
CRI (Ra):	80+	CCT, K:	3000
SDCM:	3	Light Distribution:	Symmetrical wide beam (76°...125°)
Distribution Type:	Direct	Beam angle, °:	101
LED lifetime, h:	60000/L80B10		


TECHNICAL DATA

Net weight, kg:	0.8	Mounting holes/cut-out dimensions, mm:	d165
Quantity in package, pcs:	1	Packaging volume, m3/pcs:	0.0048
Pallet quantity, pcs:	180		
Dimensions, mm:	195x195x100		

STANDARDS


Operating temperature range, °C:	ta 0...+35	Protection class IEC:	II
Ingress protection code:	IP44	Mechanical impact resistance:	IK04
EEC:	D	Certificates:	CE, UKCA, RoHS
Warranty:	3 years (5 years - see warranty Ts and Cs)		

Technical drawing (.jpg)

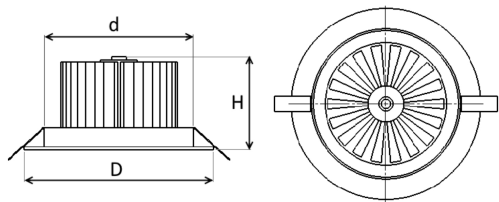

∅ D, mm	d, mm	H, mm	A, mm
195	153	100	165

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.