

**CAVER LED1X2900 D774 T740 LSA2 • 1101596**

Product:	Caver LED1x2900 D774 T740 LSA2
Order code:	1101596
Family:	Caver LED
Product group:	Outdoor accent lighting

**GENERAL DATA**

<b>Description:</b>	Surface mounted accent LED luminaire Light distribution type: direct Optical system: lenses, clear polycarbonate diffuser, impact resistant Housing: aluminium Colour: light grey
<b>Installation:</b>	On the wall (mounting brackets included). Cable, 1.0m, 3x0.75mm2
<b>Environment</b>	Outdoor
<b>Application</b>	public space, parking area, facade illumination

**ELECTRICAL DATA**

<b>Mains voltage:</b>	220-240V, 50/60Hz	<b>System power*, W:</b>	24.7
<b>Power factor:</b>	>0,95	<b>Control gear:</b>	ECG on/off
<b>Integrated sensor:</b>	None	<b>Connection:</b>	Cable, 1.0m, 3x0.75mm2

**LIGHTING DATA**

<b>Light source and cap, W:</b>	LED	<b>Light source included:</b>	yes
<b>Luminaire output*, lm(ta+25°C):</b>	2819	<b>System efficacy, lm/W:</b>	114
<b>CRI (Ra):</b>	70+	<b>CCT, K:</b>	4000
<b>SDCM:</b>	3	<b>Light Distribution:</b>	Asymmetrical
<b>Distribution Type:</b>	Direct	<b>Beam angle, °:</b>	Asymmetrical
<b>LED lifetime, h:</b>	100000/L90B10		


**TECHNICAL DATA**

<b>Net weight, kg:</b>	4	<b>Quantity in package, pcs:</b>	1
<b>Packaging volume, m3/pcs:</b>	0.0065	<b>Pallet quantity, pcs:</b>	130
<b>Dimensions, mm:</b>	380x80x170		

**STANDARDS**


<b>Operating temperature range, °C:</b>	-25...+40 C	<b>Protection class IEC:</b>	I
<b>Ingress protection code:</b>	IP66	<b>Mechanical impact resistance:</b>	IK09
<b>EEC:</b>	E	<b>Certificates:</b>	CE, RoHS
<b>Warranty:</b>	3 years		

Technical drawing (.jpg)

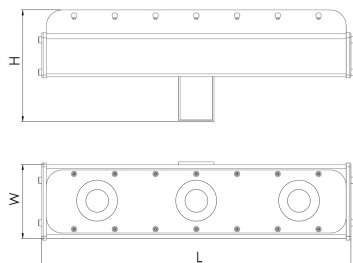

L, mm	W, mm	H, mm
380	80	170

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification