

AUSTRU D LED1x600 C406 T840 • 1019005

Product:	AUSTRU D LED1x600 C406 T840
Order code:	1019005
Family:	Austru D LED
Product group:	Outdoor accent lighting

GENERAL DATA

Description:	Surface mounted accent LED luminaire Light distribution type: direct Optical system: lenses, 2x60°, tempered glass diffuser, impact resistant Housing: aluminium Colour: dark grey (RAL7043)
Installation:	On the wall. Screw terminal, 3x1x1.5mm2
Environment	Outdoor
Application	facade illumination

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	6.7
Power factor:	>0,5	Control gear:	ECG on/off
Integrated sensor:	None	Connection:	Screw terminal, 3x1x1.5mm2

LIGHTING DATA


Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	510	System efficacy, lm/W:	77
CRI (Ra):	80+	CCT, K:	4000
SDCM:	5	Light Distribution:	Asymmetrical
Distribution Type:	Direct	Beam angle, °:	Asymmetrical
LED lifetime, h:	40000/L70B50		

TECHNICAL DATA


Net weight, kg:	0.55	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0009		
Dimensions, mm:	125x90x80		

STANDARDS

Operating temperature range, °C:	-25...+40 C	Protection class IEC:	I
Ingress protection code:	IP54	Mechanical impact resistance:	IK08
EEC:	F	Certificates:	CE, RoHS
Warranty:	3 years		
Technical drawing (.jpg)			

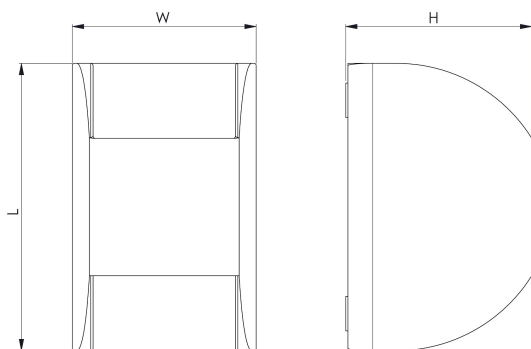

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Date of issue: 2024-03-29 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org