

AUVA LED1X19300 E938 T730 LSS2 • 1102928

Product:	Auva LED1x19300 E938 T730 LSS2
Order code:	1102928
Family:	Auva LED
Product group:	Park and street luminaires

GENERAL DATA

Description:	Pole-mounted LED street luminaire Light distribution: direct Optical system: lenses, tempered glass diffuser, impact resistant Housing: aluminum Colour: light grey (RAL7035)
Installation:	With two screws on Ø60mm horizontal or vertical pole, on the wall (mounting bracket to be ordered separately). Adjustable installation angles: on horizontal pole: +/- 15 degrees, on vertical pole: +/- 15 degrees. Screw terminal, 3x1x2.5mm2
Environment	Outdoor
Application	public space, parking area, street

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	156.2
Power factor:	>0,95	Control gear:	ECG on/off
Integrated sensor:	None	Connection:	Screw terminal, 3x1x2.5mm2

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	19153	System efficacy, lm/W:	123
CRI (Ra):	70+	CCT, K:	3000
SDCM:	3	Light Distribution:	Other
Distribution Type:	Direct	Beam angle, °:	Asymmetrical
LED lifetime, h:	100000/L90B10		


TECHNICAL DATA

Net weight, kg:	9.4	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0294	Pallet quantity, pcs:	40
Dimensions, mm:	776x320x102		


STANDARDS

Operating temperature range, °C:	ta -40...+40	Protection class IEC:	I
Ingress protection code:	IP66	Mechanical impact resistance:	IK09
EEC:	D	Certificates:	CE, RoHS
Warranty:	3 years		

Technical drawing (.jpg)

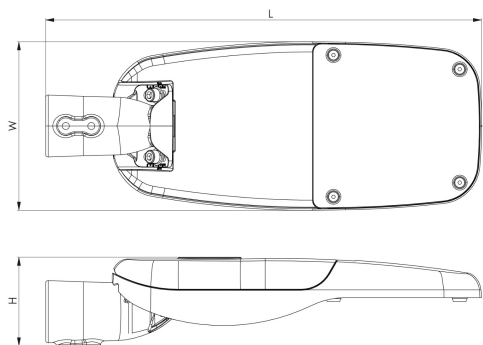

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Date of issue: 2024-04-25 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org