

CARINA P LED1X4400 G454 T830 MPRZ • 1106187



Product: Carina P LED1x4400 G454 T830 MPRZ
Order code: 1106187
Family: Carina P LED
Product group: Diffuser and wall luminaires

GENERAL DATA

Description: Surface mounted LED luminaire

Light distribution type: direct

Optical system: opal micro-linear polycarbonate diffuser

Housing: steel

Colour: white (RAL 9003)

Instalation: On ceiling or wall. Push-in terminal, 5x2x2.5mm2


Environment Indoor

Application office, education, corridor, public place, hotel, staircase, bathroom, healthcare


ELECTRICAL DATA

| Mains voltage: | 220-240V, 0/50/60Hz | System power*, W: | 28.6 |
|------------------------------------|---------------------|---------------------------------|---------------------------------------------------------------------|
| Power factor: | >0,95 | Control gear: | ECG on/off |
| Integrated sensor: | None | Surge protection (L to N), kV: | 1 |
| Surge protection (L/N to PE), kV: | 2 | Inrush current (Imax/time): | 23A/ 140μs |
| Overvoltage protection: | 330V AC, 1h | Connection: | Push-in terminal, 5x2x2.5mm2 |
| LIGHTING DATA | | | |
| Light source and cap, W: | LED | Light source included: | yes |
| Luminaire output*, lm(ta+25°C): | 4159 | System efficacy, Im/W: | 146 |
| CRI (Ra): | 80+ | CCT, K: | 3000 |
| SDCM: | 3 | Light Distribution: | Wide-wide beam (C0-C180 plane 76125 , C90-C270 plane 76 125) |
| Distribution Type: | Direct | Beam angle, °: | 124×105 |
| LED lifetime, h: | 100000/L80B10 | Ripple current (≤120 Hz), %: | ≤1 |
| TECHNICAL DATA | | | |
| Net weight, kg: | 2.8 | Quantity in package, pcs: | 1 |
| Packaging volume, m3/pcs: | 0.0129 | Pallet quantity, pcs: | 90 |
| Dimensions, mm: | 1455x97x72 | | |
| STANDARDS | | | |
| Operating temperature range, °C: | ta -15+35 | Protection class IEC: | I |
| Ingress protection code: | IP54 | Mechanical impact resistance: | IK05 |
| Protection symbol: | D | Glow wire test, °C: | 850 |
| EEC: | С | Certificates: | CE, UKCA, RoHS |
| | Warranty: | 3 years (5 years - see warranty | |

Technical drawing (.jpg)

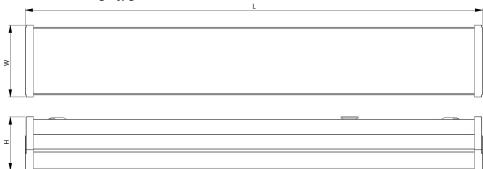

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.

Date of issue: 2024-05-04 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org