

DECOR LED1X6050 G230 T830 OP LO3 • 1105849



mage not found or type unknown

Product:	Decor LED1x6050 G230 T830 OP LO3	
Order code:	1105849	
Family:	Decor LED	
Product group: Aluminium profile luminaires		


GENERAL DATA

Description:	Surface mounted or suspended middle profile LED luminaire for in-line connection	
	Light distribution type: direct	
	Optical system: opal polycarbanate diffuser	
	Housing: aluminium	
	Colour: light grey (RAL9006S)	
Instalation:	On the ceiling or suspended (wire, cable and cap to be ordered separately), with L/LL option is designed for in-line connection. Push-in terminal. 3x2x2.5mm2	
	Tush in cerminal, SAZAZISHINIZ	
Environment	Indoor	
Application	office, education, corridor, retail, public place, hotel	


ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	48.7
Power factor:	>0,92	Control gear:	ECG on/off
Integrated sensor:	None	Surge protection (L to N), kV:	1
Surge protection (L/N to PE), kV:	2	Inrush current (Imax/time):	51 A 194 μs
Overvoltage protection:	320V AC, 1h	Connection:	Push-in terminal, 3x2x2.5mm2
LIGHTING DATA			
Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	5750	System efficacy, lm/W:	118
CRI (Ra):	80+	сст, к:	3000
SDCM:	3	Light Distribution:	Wide-wide beam (C0-C180 plane 76125 , C90-C270 plane 76125)
Distribution Type:	Direct	Beam angle, °:	109x109
LED lifetime, h:	50000/L80B10	Ripple current (≤120 Hz), %:	≤1
TECHNICAL DATA			
Net weight, kg:	4	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0093	Pallet quantity, pcs:	80
Dimensions, mm:	2253x58x68		
STANDARDS			
Operating temperature range, °C:	ta -15+35	Protection class IEC:	1
Ingress protection code:	IP40	Mechanical impact resistance:	IK05
Glow wire test, °C:	650	EEC:	D

Certificates:CE, UKCA, RoHSWarranty:3 years (5 years - see warrantyTs and Cs)

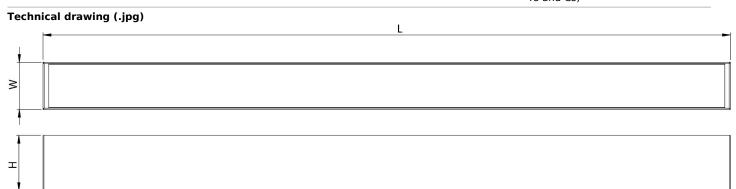

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.

Date of issue: 2024-05-02 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org