

CALIMA U LED1X2700/2200 G179 T840 DPRZ LT80 LG3 • 1105637

Image not found or type unknown

Product:	Calima U LED1x2700/2200 G179 T840 DPRZ LT80 LG3
Order code:	1105637
Family:	Calima U LED
Product group:	Surface and suspended luminaires

GENERAL DATA

Description:	Suspended LED luminaire Light distribution type: direct (direct/indirect LG3 versions) Optical system: matt micro-prismatic PMMA diffuser, low glare/ translucent micro-prismatic PMMA diffuser Housing: steel Colour: white (RAL9003)
Installation:	Suspended (accessories to be ordered separately), with L/LL option is designed for in-line connection. Push-in terminal, 3x2x2.5mm2
Environment	Indoor
Application	office, education, retail, public place

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	29.6
Power factor:	>0,95	Control gear:	ECG on/off
Integrated sensor:	None	Surge protection (L to N), kV:	1
Surge protection (L/N to PE), kV:	2	Inrush current (Imax/time):	23A/ 140µs
Overvoltage protection:	330V AC, 1h	Connection:	Push-in terminal, 3x2x2.5mm2

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	4872	System efficacy, lm/W:	165
CRI (Ra):	80+	CCT, K:	4000
SDCM:	3	Light Distribution:	Wide-wide beam (C0-C180 plane 75 ...125 , C90-C270 plane 75 ...125)
Distribution Type:	Direct/indirect (60/40)	Beam angle, °:	89x90
UGR index:	≤16	LED lifetime, h:	100000/L80B10
Ripple current (≤120 Hz), %:	≤1		

TECHNICAL DATA


Net weight, kg:	4.6	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0114	Pallet quantity, pcs:	80
Dimensions, mm:	1215x175x40		

STANDARDS


Operating temperature range, °C:	ta 0...+35	Protection class IEC:	I
Ingress protection code:	IP40	Mechanical impact resistance:	IK05

EEC:	B	Certificates:	CE, RoHS
Warranty:	3 years (5 years – see warranty Ts and Cs)		

Technical drawing (.jpg)

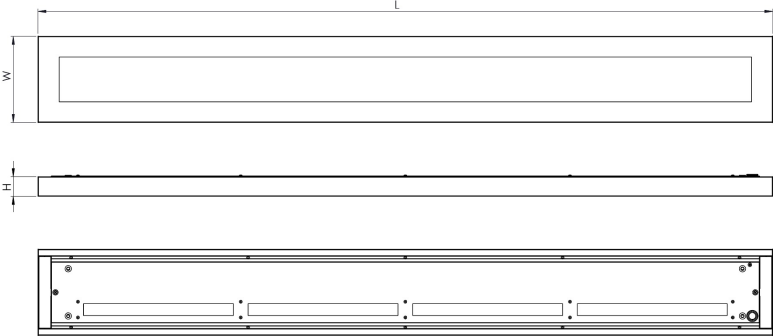

Light distribution curve (.jpg)



Note:	Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.
-------	---