

NORTE I LED1X21250 G108 T840 ALU L60 SPORT • 1107679



Image not found or type unknown


| Product: | Norte I LED1x21250 G108 T840 ALU L60 SPORT | |
|---------------|--|--|
| Order code: | 1107679 | |
| Family: | Norte I LED SPORT | |
| Product group | : Highbays | |
| GENERAL DATA | | |

| Description: | Surface mounted high-bay LED luminaire Light distribution type: direct Optical system: lenses, silicone rubber gasket, impact resistant Housing: aluminium Colour: white (RAL9003) |
|--------------|--|
| Instalation: | On the ceiling or wall. Push-in terminal, 5x2x2.5mm2 |
| Environment | Indoor |
| Application | industry, warehouse, hall, sports, transport terminal |

ELECTRICAL DATA


| Mains voltage: | 220-240V, 0/50-60Hz | System power*, W: | 122.1 |
|-------------------------------------|------------------------------|--------------------------------------|---|
| Power factor: | 0.99 | Control gear: | ECG on/off |
| Surge protection (L to N), kV: | 1 | Surge protection (L/N to PE), kV: | 2 |
| Inrush current (Imax/time): | 51A/ 286µs | Overvoltage protection: | 320V AC, 1h |
| Connection: | Push-in terminal, 5x2x2.5mm2 | | |
| LIGHTING DATA | | | |
| Light source and cap, W: | LED | Light source included: | yes |
| Luminaire output*, lm(ta+25°C): | 19237 | System efficacy, lm/W: | 158 |
| CRI (Ra): | 80+ | ССТ, К: | 4000 |
| SDCM: | 3 | Light Distribution: | Symmetrical medium beam (31 75) |
| Distribution Type: | Direct | Beam angle, °: | 51 |
| UGR index: | ≤22 | LED lifetime, h: | 100000/L80B10 |
| Ripple current (≤120 Hz), %: | ≤2 | | |
| TECHNICAL DATA | | | |
| Net weight, kg: | 2.6 | Quantity in package, pcs: | 1 |
| Packaging volume, m3/pcs: | 0.0115 | Pallet quantity, pcs: | 80 |
| Dimensions, mm: | 1190x114x91 | | |
| STANDARDS | | | |
| Operating temperature range, °C: | -20+35 C | Protection class IEC: | I |
| Ingress protection code: | IP65 | Mechanical impact resistance: | IK10 |
| Protection symbol: | D | EEC: | В |
| Certificates: | CE, UKCA, RoHS | Warranty: | 3 years (5 years – see warranty Ts and Cs) |
| | | | |

Technical drawing (.jpg)

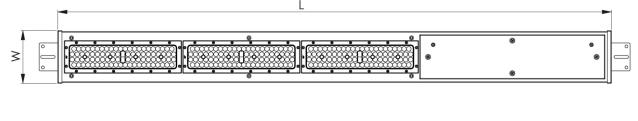



Light distribution curve (.jpg)



Note:

| Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature |
|---|
| of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right |
| is reserved to change any product specifications without prior notification. Photos are for |
| illustrational purposes only. The exact appearance of the product may vary depending on the |
| monitor settings, options selected and other factors. |

Date of issue: 2024-05-03
NORTHCLIFFE LIGHTING, UAB
Raudondvario pl. 101, LT-47184 Kaunas, Lithuania
info@northcliffe.org
www.northcliffe.org