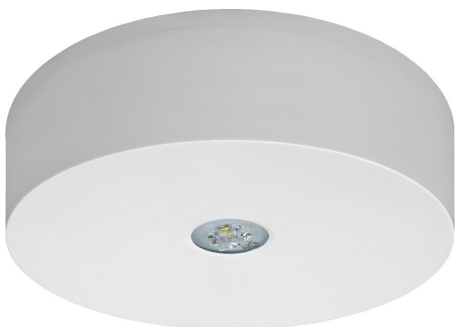


ARA S CEBLED C393 LER IP65 • 1103356

Product:	Ara S CEBLED C393 LER IP65
Order code:	1103356
Family:	Ara S LED
Product group:	Emergency lighting

GENERAL DATA

Description:	Surface mounted LED emergency escape luminaire Light distribution type: direct Optical system: lenses Housing: polycarbonate Colour: white
Installation:	On the ceiling or suspended (suspension bracket, wire to be ordered on request). Push-in terminal, 2x2x2.5mm2
Environment	Indoor
Application	escape route lighting

ELECTRICAL DATA

Mains voltage:	220-240VAC, 50-60Hz; 176-275VDC	System power*, W:	6
Power factor:	>0,60	Control gear:	ECG on/off
Illumination mode:	CEB	Emergency operating time, h:	x
Connection:	Push-in terminal, 2x2x2.5mm2		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	790	CRI (Ra):	80+
CCT, K:	6000	SDCM:	3
Light Distribution:	Narrow-wide beam (C0-C180 plane ≤ 30°, C90-C270 plane 76°...125°)	Distribution Type:	Direct
Beam angle, °:	22x162	LED lifetime, h:	70000/L80B10


TECHNICAL DATA

Net weight, kg:	1.5	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0025	Pallet quantity, pcs:	300
Dimensions, mm:	202x202x58		


STANDARDS

Operating temperature range, °C:	ta -25...+50	Protection class IEC:	II
Ingress protection code:	IP65	Mechanical impact resistance:	IK08
Certificates:	CE, UKCA, RoHS	Warranty:	2 years

Technical drawing (.jpg)

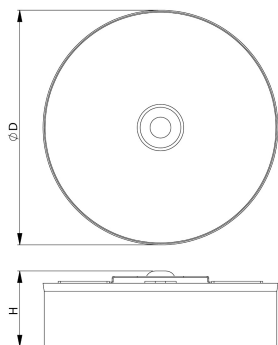

Light distribution curve (.jpg)

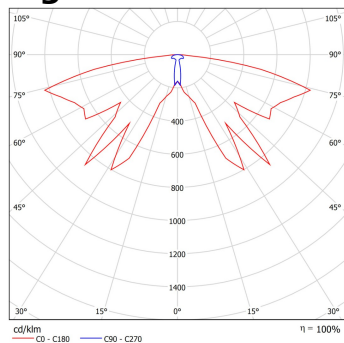

Note:

*: CEB maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: $\pm 10\%$, values apply to an ambient temperature of 25°C. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.