

LEPUS S CEBLED E998 2CLR • 1103369

Product:	Lepus S CEBLED E998 2CLR
Order code:	1103369
Family:	Lepus S LED
Product group:	Emergency lighting

GENERAL DATA

Description:	Wall-mounted LED emergency exit sign Light distribution type: omnidirectional Optical system: clear PMMA diffuser Housing: polycarbonate Colour: white Recognition distance: 30 meters
Installation:	On the wall. Push-in terminal, 2x2x2.5mm2
Environment	Indoor
Application	emergency exit sign

ELECTRICAL DATA

Mains voltage:	220-240VAC, 50/60Hz; 176-275VDC	System power*, W:	3
Power factor:	>0,60	Control gear:	ECG on/off
Illumination mode:	CEB	Emergency operating time, h:	x
Connection:	Push-in terminal, 2x2x2.5mm2		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	80	CRI (Ra):	80+
CCT, K:	6000	SDCM:	3
Light Distribution:	Other	Distribution Type:	Omnidirectional
LED lifetime, h:	70000/L80B10		


TECHNICAL DATA

Net weight, kg:	1.1	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0038	Pallet quantity, pcs:	256
Dimensions, mm:	337x57x189		

STANDARDS

Operating temperature range, °C:	ta 0...+50	Protection class IEC:	II
Ingress protection code:	IP40	Mechanical impact resistance:	IK05
Certificates:	CE, UKCA, RoHS	Warranty:	2 years

Technical drawing (.jpg)

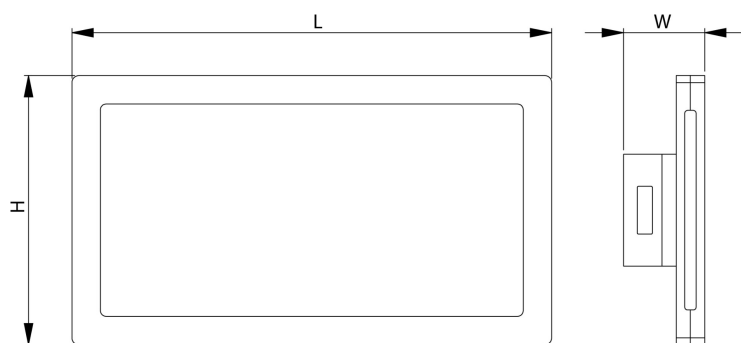

Note:

*: CEB maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: $\pm 10\%$, values apply to an ambient temperature of 25°C. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.

Date of issue: 2024-05-04 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org