

SPICA LED1X2850 G549 T840 L90W • 1111891

Product:	Spica LED1x2850 G549 T840 L90W
Order code:	1111891
Family:	Spica LED
Product group:	Akcentiniai vidaus šviestuvai

GENERAL DATA

Description:	Track mounted linear LED luminaire Light distribution type: direct Optical system: lenses Housing: steel Colour: white (RAL9003)
Installation:	In 3-phase track. Track adaptor (3-phase + N) with phase selector
Environment	Indoor
Application	retail, public place, showroom, exhibition

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	16.9
Power factor:	>0,85	Control gear:	ECG on/off
Integrated sensor:	None	Surge protection (L to N), kV:	1
Surge protection (L/N to PE), kV:	2	Inrush current (Imax/time):	22A/ 140μs
Overvoltage protection:	320V AC, 1h	Connection:	Track adaptor (3-phase + N) with phase selector

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	2847	System efficacy, lm/W:	165
CRI (Ra):	80+	CCT, K:	4000
SDCM:	3	Light Distribution:	Wide-wide beam (C0-C180 plane 76°...125°, C90-C270 plane 76°...125°)
Distribution Type:	Direct	Beam angle, °:	88x89
UGR index:	≤22	LED lifetime, h:	100000/L80B10
Ripple current (≤120 Hz), %:	≤1		

TECHNICAL DATA


Net weight, kg:	1.7	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0064	Pallet quantity, pcs:	130
Dimensions, mm:	856x59x70		

STANDARDS


Operating temperature range, °C:	ta 0...+35	Protection class IEC:	I
Ingress protection code:	IP20	Mechanical impact resistance:	IK02
EEC:	B	Certificates:	CE, UKCA, RoHS

Warranty: 3 years (5 years – see warranty
Ts and Cs)

Technical drawing (.jpg)

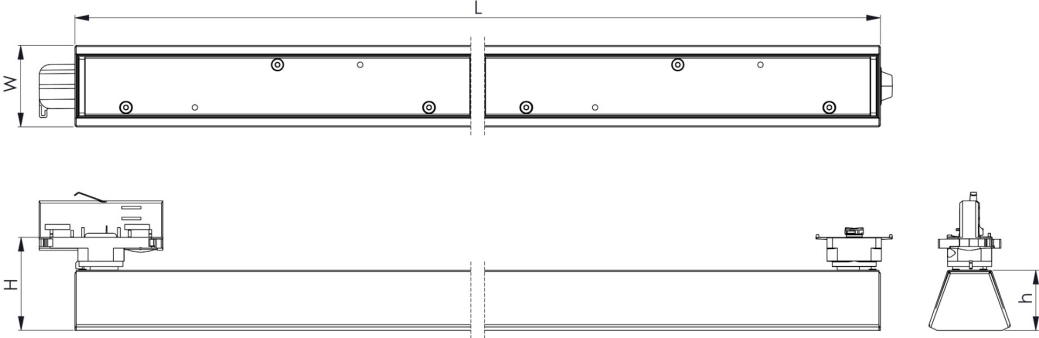

Light distribution curve (.jpg)



Note: Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.