

CAVER LED1X2900 D774 T730 LS45 • 1108736

Product:	Caver LED1x2900 D774 T730 LS45
Order code:	1108736
Family:	Caver LED
Product group:	Outdoor accent lighting

GENERAL DATA

Description:	Surface mounted accent LED luminaire Light distribution type: direct Optical system: lenses, clear polycarbonate diffuser, impact resistant Housing: aluminium Colour: light grey
Installation:	On the wall (mounting brackets included). Cable, 1.0m, 3x0.75mm2
Environment	Outdoor
Application	public space, parking area, facade illumination

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	24.7
Power factor:	>0,95	Control gear:	ECG on/off
Integrated sensor:	None	Connection:	Cable, 1.0m, 3x0.75mm2

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	2706	System efficacy, lm/W:	114
CRI (Ra):	70+	CCT, K:	3000
SDCM:	3	Light Distribution:	Symmetrical medium beam (31°...75°)
Distribution Type:	Direct	Beam angle, °:	52
LED lifetime, h:	100000/L90B10		


TECHNICAL DATA

Net weight, kg:	4	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0065	Pallet quantity, pcs:	130
Dimensions, mm:	380x80x170		

STANDARDS


Operating temperature range, °C:	-25...+40 C	Protection class IEC:	I
Ingress protection code:	IP66	Mechanical impact resistance:	IK09
EEC:	E	Certificates:	CE, RoHS
Warranty:	3 years		

Technical drawing (.jpg)

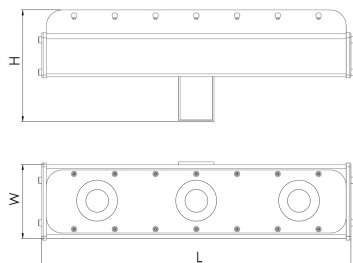

L, mm	W, mm	H, mm
380	80	170

Light distribution curve (.jpg)



Note: Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Date of issue: 2024-04-20 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org