

CYGNI LED1X6400 D780 T730 L30 • 1108734


Product:	Cygni LED1x6400 D780 T730 L30
Order code:	1108734
Family:	Cygni LED
Product group:	Outdoor accent lighting

GENERAL DATA

Description:	Surface mounted accent LED luminaire Light distribution type: direct Optical system: lenses, 30°, tempered glass diffuser, impact resistant Housing: aluminium Colour: light grey
Installation:	On the horizontal or vertical surface (mounting bracket included). Cable, 1.0m, 3x1.5mm ²
Environment	Outdoor
Application	facade illumination

ELECTRICAL DATA

Mains voltage:	220-240V, 50/60Hz	System power*, W:	59.7
Power factor:	>0,95	Control gear:	ECG on/off
Integrated sensor:	None	Connection:	Cable, 1.0m, 3x1.5mm ²

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	6072	System efficacy, lm/W:	106
CRI (Ra):	80+	CCT, K:	3000
SDCM:	3	Light Distribution:	Symmetrical narrow beam (16°...30°)
Distribution Type:	Direct	Beam angle, °:	27
LED lifetime, h:	50000/L80B50		


TECHNICAL DATA

Net weight, kg:	6	Quantity in package, pcs:	1
Packaging volume, m³/pcs:	0.0206	Pallet quantity, pcs:	50
Dimensions, mm:	1265x82x164		


STANDARDS

Operating temperature range, °C:	-25...+40 C	Protection class IEC:	I
Ingress protection code:	IP66	Mechanical impact resistance:	IK09
EEC:	E	Certificates:	CE, RoHS
Warranty:	3 years (5 years – see warranty Ts and Cs)		

Technical drawing (.jpg)

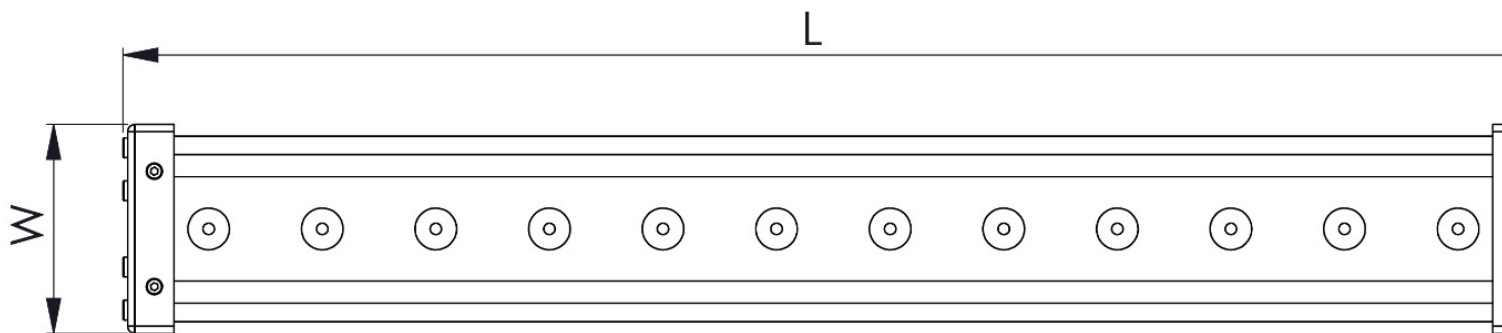

Light distribution curve (.jpg)

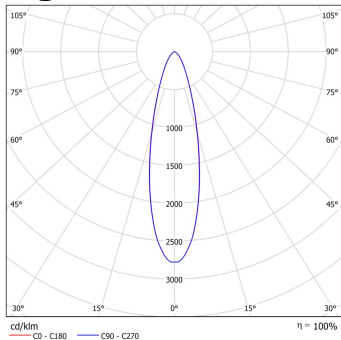

Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.