

**PROOF LED1X2850 G484 T840 OP LT80 • 1106273**


|                |                                     |
|----------------|-------------------------------------|
| Product:       | Proof LED1x2850 G484 T840 OP LT80   |
| Order code:    | 1106273                             |
| Family:        | Proof LED                           |
| Product group: | Waterproof and cleanroom luminaires |

**GENERAL DATA**

|                      |   |
|----------------------|---|
| <b>Description:</b>  | Surface mounted waterproof LED luminaire for use in food industry and aggressive environments<br>Light distribution type: direct<br>Diffuser: opal acrylic diffuser, good chemical resistance<br>Housing: thermoplastic, good chemical resistance<br>Colour: light grey |
| <b>Installation:</b> | On the ceiling or wall (mounting brackets included), or suspended (hooks included). Push-in terminal, 5x2x2.5mm2  |
| <b>Environment</b>   | Indoor  |
| <b>Application</b>   | industry, warehouse, hall, food processing area, agriculture.   |

**ELECTRICAL DATA**

|  |                     |                                       |                              |
|--|---------------------|---------------------------------------|------------------------------|
| <b>Mains voltage:</b>                    | 220-240V, 0/50/60Hz | <b>System power*, W:</b>              | 18.2                         |
| <b>Power factor:</b>                     | >0,90               | <b>Control gear:</b>                  | ECG on/off                   |
| <b>Integrated sensor:</b>                | None                | <b>Surge protection (L to N), kV:</b> | 1                            |
| <b>Surge protection (L/N to PE), kV:</b> | 2                   | <b>Inrush current (Imax/time):</b>    | 23A/ 176µs                   |
| <b>Overvoltage protection:</b>           | 320V AC, 1h         | <b>Connection:</b>                    | Push-in terminal, 5x2x2.5mm2 |

**LIGHTING DATA**

|  |               |                                     |  |
|--|---------------|-------------------------------------|--|
| <b>Light source and cap, W:</b>        | LED           | <b>Light source included:</b>       | yes  |
| <b>Luminaire output*, lm(ta+25°C):</b> | 2833          | <b>System efficacy, lm/W:</b>       | 155  |
| <b>CRI (Ra):</b>                       | 80+           | <b>CCT, K:</b>                      | 4000   |
| <b>SDCM:</b>                           | 3             | <b>Light Distribution:</b>          | Wide-wide beam (C0-C180 plane 76 ...125 , C90-C270 plane 76 ...125 ) |
| <b>Distribution Type:</b>              | Direct        | <b>Beam angle, °:</b>               | 125x103  |
| <b>LED lifetime, h:</b>                | 100000/L80B10 | <b>Ripple current (≤120 Hz), %:</b> | ≤2   |

**TECHNICAL DATA**

|                                  |            |                                  |     |
|----------------------------------|------------|----------------------------------|-----|
| <b>Net weight, kg:</b>           | 1.3        | <b>Quantity in package, pcs:</b> | 1   |
| <b>Packaging volume, m3/pcs:</b> | 0.0087     | <b>Pallet quantity, pcs:</b>     | 120 |
| <b>Dimensions, mm:</b>           | 662x96x111 |                                  |     |


**STANDARDS**

|   |              |                                      |                |
|---|--------------|--------------------------------------|----------------|
| <b>Operating temperature range, °C:</b> | ta -20...+35 | <b>Protection class IEC:</b>         | I              |
| <b>Ingress protection code:</b>         | IP66         | <b>Mechanical impact resistance:</b> | IK06           |
| <b>Protection symbol:</b>               | D            | <b>Glow wire test, °C:</b>           | 650            |
| <b>EEC:</b>                             | C            | <b>Certificates:</b>                 | CE, UKCA, RoHS |


Warranty:

3 years (5 years – see warranty  
Ts and Cs)

Technical drawing (.jpg)

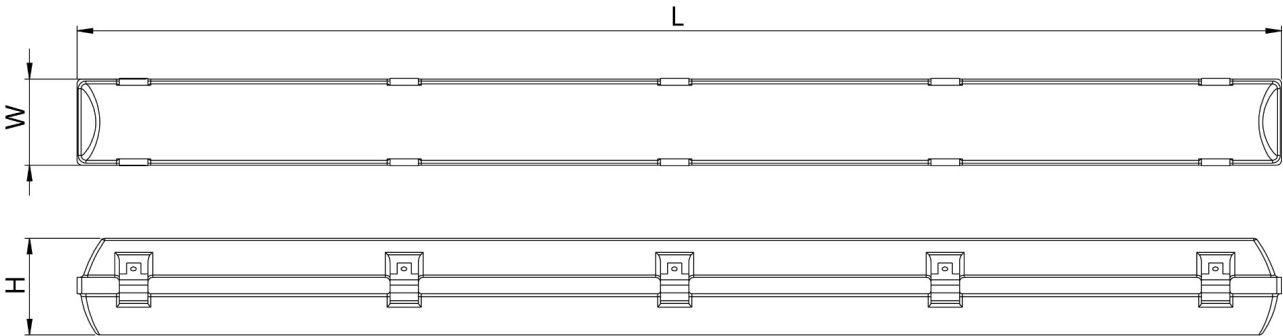

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.