

SPICA LED1X4150 G550 T830 L75W • 1111865


Product:	Spica LED1x4150 G550 T830 L75W
Order code:	1111865
Family:	Spica LED
Product group:	Spotlights

GENERAL DATA

Description:	Track mounted linear LED luminaire Light distribution type: direct Optical system: lenses Housing: steel Colour: white (RAL9003)
Installation:	In 3-phase track. Track adaptor (3-phase + N) with phase selector
Environment	Indoor
Application	retail, public place, showroom, exhibition

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	22.8
Power factor:	>0,95	Control gear:	ECG on/off
Integrated sensor:	None	Surge protection (L to N), kV:	1
Surge protection (L/N to PE), kV:	2	Inrush current (Imax/time):	23A/ 140µs
Overvoltage protection:	330V AC, 1h	Connection:	Track adaptor (3-phase + N) with phase selector

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	3930	System efficacy, lm/W:	161
CRI (Ra):	80+	CCT, K:	3000
SDCM:	3	Light Distribution:	Medium-medium beam (C0-C180 plane 31°...75°, C90-C270 plane 31°...75°)
Distribution Type:	Direct	Beam angle, °:	75x71
UGR index:	≤19	LED lifetime, h:	100000/L80B10
Ripple current (≤120 Hz), %:	≤1		

TECHNICAL DATA

Net weight, kg:	1.7	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.0064	Pallet quantity, pcs:	130
Dimensions, mm:	856x59x70		


STANDARDS

Operating temperature range, °C:	ta 0...+35	Protection class IEC:	I
Ingress protection code:	IP20	Mechanical impact resistance:	IK02
EEC:	B	Certificates:	CE, UKCA, RoHS


Warranty:

3 years (5 years – see warranty
Ts and Cs)

Technical drawing (.jpg)

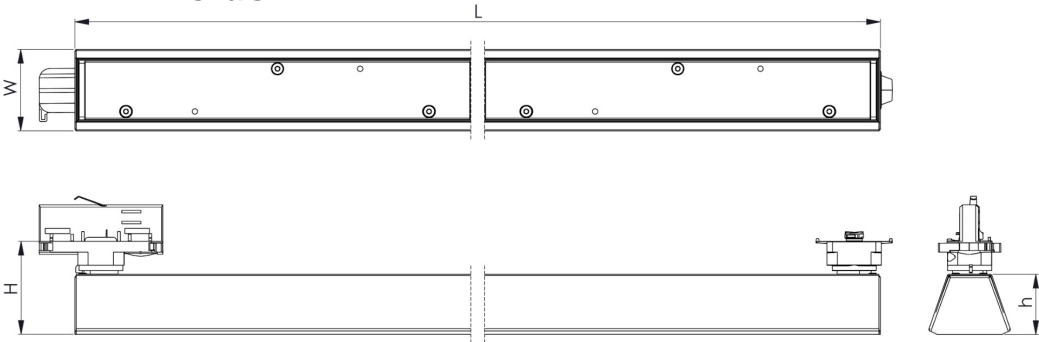

Light distribution curve (.jpg)



Note:

Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification. Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.